

ODAC® 14XY

Modern two axis measuring head from the ODAC® laser measuring unit series. Highest accuracy, robustness, reliability and functionality distinguish all the laser measuring heads from ZUMBACH. Thanks to the compact design, the ODAC® 14XY measuring heads can be used in virtually every manufacturing process in the wire and cable industry, the plastics and rubber industry as well as the steel and metal industry. Known for precision, quality and ease of use the laser measuring heads from ZUMBACH are among the best of their class.

The technological basis considered for these measuring heads is always of the latest cutting edge technology, with laser diodes as light sources combined with intelligent and powerful measured-value processors which facilitate a simple and flexible integration. Our long-standing experience as a pioneer of in-line measuring technology, combined with high production figures result in a product with an excellent price-performance ratio.

Amongst the outstanding features are features such as single scan calibration (CSS), single scan monitoring and high data rate output of up to 125* data packages per second.

The measuring heads can be used with all line speeds. Vibrations during production have no noticeable influence on measurements.

Adaptive signal processing in the measuring units increase accuracy

All the measuring heads of the ODAC® series have adaptive signal processing (patent DE3111356), which makes subsequent regular re-calibrations superfluous. Only in instances of component exchange or compliance to calibration regulations ISO 9001 etc. would re-calibration be required.

All the relevant parameters for accuracy are continuously monitored by the measuring system and automatically compensated. This is valid in particular also for possible long-term changes of the behaviour of the scanner motor or the measuring electronics.

* Depending on the measuring head model, the number of transmitted measured values as well as the baud rate of the interface.

Display unit (option):
 VISU-Touch or LOC 01



Specially suited for:

Fine and extra fine wires, enamelled wires, cables, steel cords, fibres, medical tubing, extruded plastic or rubber products.


Available for 2 measuring ranges:

- Standard version from \varnothing 0.06 mm (.0024 in.)
 - Micro version from \varnothing 0.015 mm (.0006 in.)
- Thanks to the use of a blue laser at the micro versions, smallest diameters within the micrometer range can be measured.

Flexible communication integration

- RS (-232/-422/-485)
- DP (Profibus DP)
- EI (EtherNet/IP)
- J/J-M (digital, for connection to USYS processors)
- EN (Ethernet TCP/IP)
- PN (Profinet IO V2.3)


Dimensions

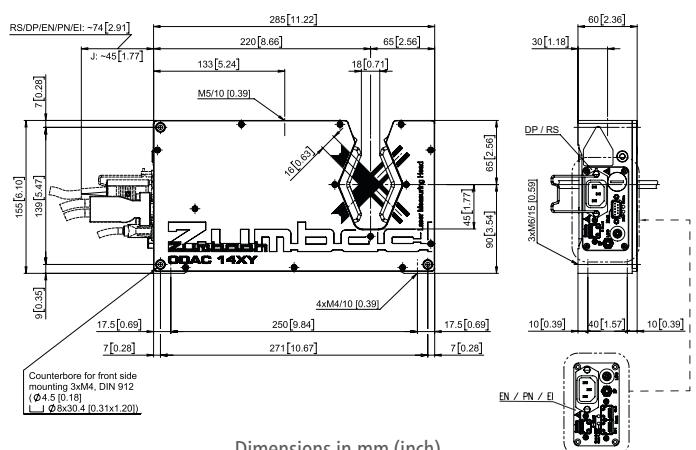

Dimensions in mm (inch)

System Overviews


ODAC® 14XY-EN-RS (serial interface)

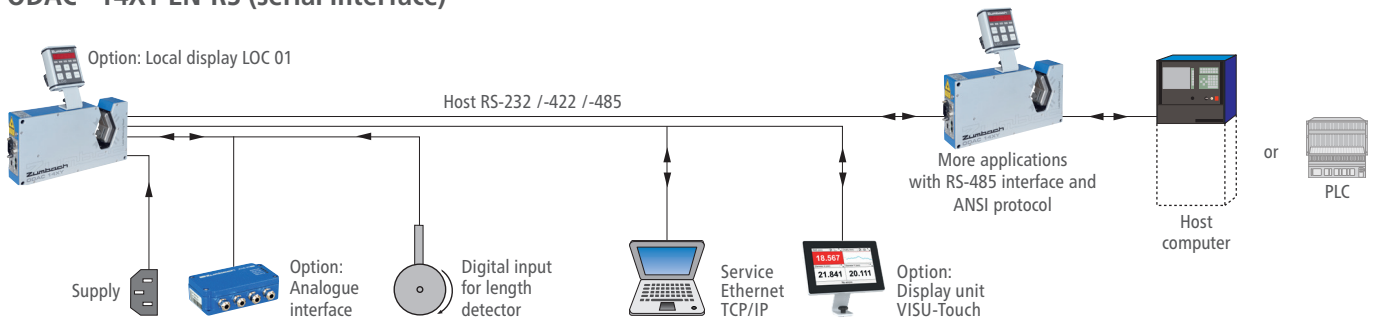

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. The RS version communicates via the integrated RS interface with a higher level system, like USYS from Zumbach, Host

computer (or PLC). The Zumbach protocols ODAC or Host are selectable according to choice. The service interface (Ethernet TCP/IP) is used for configuring the measuring system.


ODAC® 14XY-EN-DP (Profibus DP), -EN-PN (Profinet IO) or -EN-EI (EtherNet/IP)

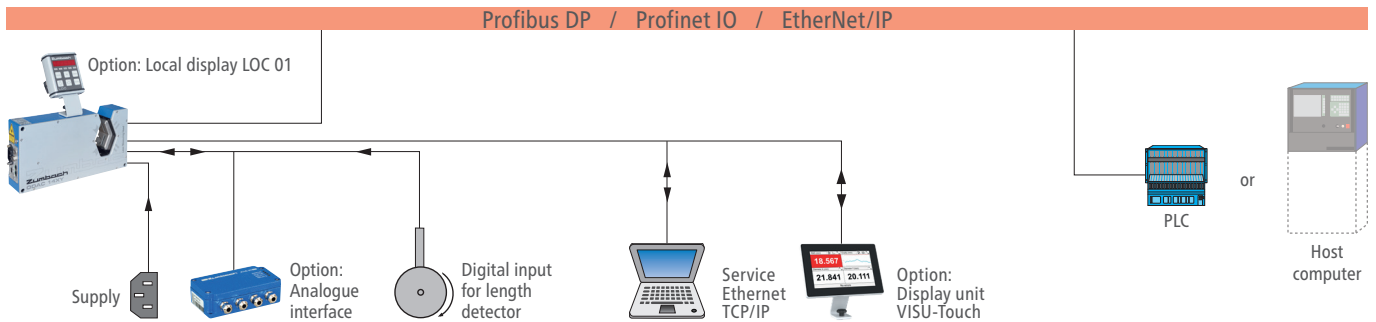

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. These versions communicate via the integrated Profibus DP, Profinet IO or EtherNet/IP interface with a higher level system. These interfaces are designed for high speed data transfer at

the sensor actuator level. At this level, controllers such as programmable logic controllers (or PLC's) exchange data via a fast serial (Profibus DP) or Ethernet (Profinet IO) connection with their distributed peripherals such as drivers, valves or intelligent slaves like ODAC measuring heads from Zumbach.

ODAC® 14XY-EN-EN (Ethernet)

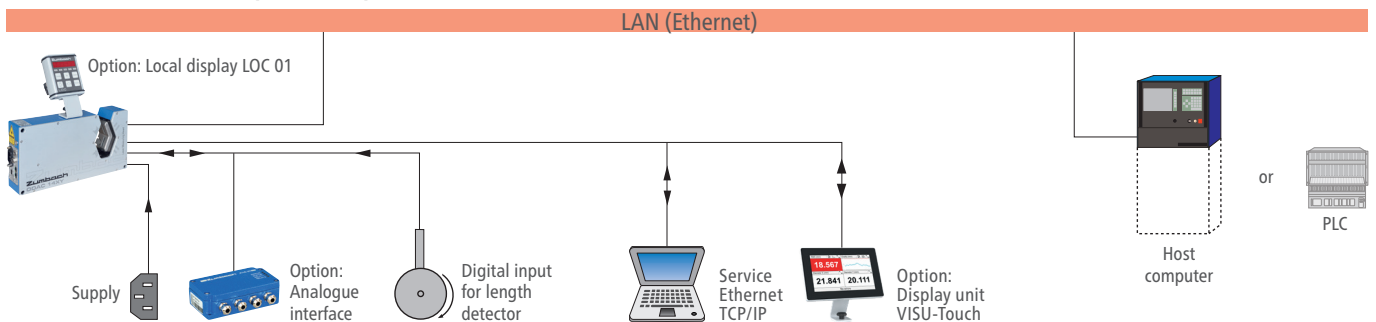
















The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. The EN version communicates via the integrated EN interface with a higher level system. The measured values and


parameters are integrated and transferred using a selectable Zumbach protocol (ODAC or Host protocol) in standardized packages of the TCP/IP. TCP/IP allows the data transfer through existing networks such as LANs and others.


ODAC® 14XY-J with the corresponding external ZUMBACH processors





Accessories


Description	Order Number
Floor stand ST2-ODAC 14XY Floor stand ST2-ODAC 14XY 45° Vertically adjustable. Line height (H): 900...1200 mm, (35.4...47.25 in.) ► Special lateral supports with rotary holder are available for USYS 20 processors (corresponding data sheets are available on request).	ST02.061.14000 ST02.061.14010
	
Swivel floor stand ST6-ODAC 14XY Vertically adjustable. Line height (H): 860...1150 mm (33.86...45.28 in.) Opening angle: 90°	ST06.139.14000
	
Limiting socket VF15-ODAC15 Used as a device to delimit the measuring field. It has <u>no</u> guiding function!	ODAC.151.420
	
Guide VF6-ODAC15 With ceramic rollers (V shape) for measured object diameter up to 6 mm (.24 in.).	ODAC.151.430
	
Guide VR1M-ODAC15 With ceramic rollers (V shape). For measured object diameter smaller than 1 mm (.04 in.). The measured object must be guided precisely through the middle of the measuring field.	ODAC.151.450
	
Guide VR10-ODAC15 With steel rollers (V shape) for measured object diameter up to 10 mm (.4 in.).	ODAC.151.470
	
Guide DF4-ODAC15 With ceramic guides. Used for the positioning of products such as monofilaments and similar. For measured object diameter of up to 4 mm (.16 in.).	ODAC.151.500
	
Guide FR13B-ODAC18 With flat ceramic rollers. Used for the precise guiding of flat profiles, having a border length of up to max. 13 mm (.51 in.).	ODAC.181.430
	
Guide VF16-ODAC18 Continuously adjustable. It is suitable for the centric guidance of products with diameter of up to 16 mm (.63 in.).	ODAC.181.440
	
Guide FRG6B-ODAC18 With flat ceramic rollers and counter rollers. Used for the precise guiding of flat profiles, having a border length of up to max. 6 mm (.24 in.).	ODAC.181.460
	
Guide VR16-ODAC18 Continuously adjustable. It is suitable for the centric guidance of products with diameter of up to 16 mm (.63 in.).	ODAC.181.470
	
Guide FR6B-ODAC18 With flat ceramic rollers. Best for the guiding of flat profiles, having a border length of up to max. 6 mm (.24 in.).	ODAC.181.480-06
	
Set of calibration standards Delivered in a protection box, comprising: – Calibration standard holder – Calibration standard \varnothing 0.5 (.02 in.) – Calibration standard \varnothing 10 mm (.5 in.) – Certificate Other calibration standards on request.	ODAC.9500.38000
	
Set of calibration standard for VR1M guide Delivered in a protection box, comprising: – Calibration standard \varnothing 0.05 mm (.002 in.) – Calibration standard \varnothing 1.0 mm (.05 in.) – Certificate Other calibration standards on request.	ODAC.9500.10110
	
Proximity switch The proximity switch is used for the length detection. Main data: – Standard: EN 60947-5-6 (NAMUR, NC) – Switching distance max. 2 mm (.08 in.), flush mounting – Ambient temperature: -25...100° C (-13...212° F) – Protection: IP 67, Connection: PVC cable 2 m (6.5 ft.)	A16 100 0110
	


Description	Order Number																																				
Air curtain LV.D-ODAC 15-18 Pressurized dust guard. Recommended for wire drawing applications.	ODAC.151.140																																				
Metal bushing with ceramic inserts. For the air curtain it's essential to select the corresponding bushing pair:																																					
<table border="1"> <thead> <tr> <th>Part no.</th> <th>Bushing \varnothing</th> <th>Max. Product \varnothing:</th> </tr> </thead> <tbody> <tr> <td>B.ODAC.151.1440</td> <td>1.5 mm (.06 in.)</td> <td>1.000 mm (.04 in.)</td> </tr> <tr> <td>B.ODAC.151.1450</td> <td>2.5 mm (.10 in.)</td> <td>2.000 mm (.08 in.)</td> </tr> <tr> <td>B.ODAC.151.1460</td> <td>3.5 mm (.14 in.)</td> <td>3.000 mm (.12 in.)</td> </tr> <tr> <td>B.ODAC.151.1470</td> <td>4.5 mm (.18 in.)</td> <td>4.000 mm (.16 in.)</td> </tr> <tr> <td>B.ODAC.151.1480</td> <td>5.5 mm (.22 in.)</td> <td>5.000 mm (.20 in.)</td> </tr> <tr> <td>B.ODAC.151.1500</td> <td>6.5 mm (.26 in.)</td> <td>5.500 mm (.22 in.)</td> </tr> <tr> <td>B.ODAC.151.1510</td> <td>8.0 mm (.32 in.)</td> <td>7.000 mm (.28 in.)</td> </tr> <tr> <td>B.ODAC.151.1490</td> <td>9.0 mm (.35 in.)</td> <td>8.000 mm (.32 in.)</td> </tr> <tr> <td>B.ODAC.151.1520</td> <td>10.0 mm (.40 in.)</td> <td>9.000 mm (.35 in.)</td> </tr> <tr> <td>B.ODAC.151.1530</td> <td>11.0 mm (.43 in.)</td> <td>10.000 mm (.40 in.)</td> </tr> <tr> <td>B.ODAC.151.1540</td> <td>12.0 mm (.47 in.)</td> <td>11.000 mm (.43 in.)</td> </tr> </tbody> </table> ► Suitable maintenance kit see below.	Part no.	Bushing \varnothing	Max. Product \varnothing :	B.ODAC.151.1440	1.5 mm (.06 in.)	1.000 mm (.04 in.)	B.ODAC.151.1450	2.5 mm (.10 in.)	2.000 mm (.08 in.)	B.ODAC.151.1460	3.5 mm (.14 in.)	3.000 mm (.12 in.)	B.ODAC.151.1470	4.5 mm (.18 in.)	4.000 mm (.16 in.)	B.ODAC.151.1480	5.5 mm (.22 in.)	5.000 mm (.20 in.)	B.ODAC.151.1500	6.5 mm (.26 in.)	5.500 mm (.22 in.)	B.ODAC.151.1510	8.0 mm (.32 in.)	7.000 mm (.28 in.)	B.ODAC.151.1490	9.0 mm (.35 in.)	8.000 mm (.32 in.)	B.ODAC.151.1520	10.0 mm (.40 in.)	9.000 mm (.35 in.)	B.ODAC.151.1530	11.0 mm (.43 in.)	10.000 mm (.40 in.)	B.ODAC.151.1540	12.0 mm (.47 in.)	11.000 mm (.43 in.)	
Part no.	Bushing \varnothing	Max. Product \varnothing :																																			
B.ODAC.151.1440	1.5 mm (.06 in.)	1.000 mm (.04 in.)																																			
B.ODAC.151.1450	2.5 mm (.10 in.)	2.000 mm (.08 in.)																																			
B.ODAC.151.1460	3.5 mm (.14 in.)	3.000 mm (.12 in.)																																			
B.ODAC.151.1470	4.5 mm (.18 in.)	4.000 mm (.16 in.)																																			
B.ODAC.151.1480	5.5 mm (.22 in.)	5.000 mm (.20 in.)																																			
B.ODAC.151.1500	6.5 mm (.26 in.)	5.500 mm (.22 in.)																																			
B.ODAC.151.1510	8.0 mm (.32 in.)	7.000 mm (.28 in.)																																			
B.ODAC.151.1490	9.0 mm (.35 in.)	8.000 mm (.32 in.)																																			
B.ODAC.151.1520	10.0 mm (.40 in.)	9.000 mm (.35 in.)																																			
B.ODAC.151.1530	11.0 mm (.43 in.)	10.000 mm (.40 in.)																																			
B.ODAC.151.1540	12.0 mm (.47 in.)	11.000 mm (.43 in.)																																			
																																					


Description	Order Number
Hose assembly for air curtain Compressed air hose assembly with connection nipples for the air supply of the standard mounted air curtains/splash guards.	ODAC.151.120
	

Description	Order Number
Maintenance kit Cleans and keeps the compressed air free of dirt. Features: Filter regulators, submicrofilter, manometer, pressure difference display, automatic condensate emptying and wall fixture.	A34 200 0050
	


Description	Order Number
Air curtain LV.G-ODAC 15 ODAC 15/18XY Protective device for wire drawing application. It is supplied with filtered air by the GE 6 blower unit. The air curtain is supplied with 2.0 m (6.5 ft.) hose and two hose clamps.	ODAC.151.940
	


Description	Order Number
Blower unit GE 6 Order number: GE.601.06000 (230V/50Hz/0.2kW) Order number: GE.601.06010 (115V/60Hz/0.2kW) Spare filter cartridge CF4 to FL2/FL3/FL4: Order number: A15 105 3230	GE.601.060XX
	

Description	Order Number
Local display LOC 01 Is mounted directly on the measuring head. Requires connection cable # ODAC.9167.00004 between LOC 01 and the measuring head. Not for ODAC J versions.	LOC.011.01000
	

Description	Order Number
VISU-Touch The VISU-Touch is a rugged and compact 7" touch screen. This universal PoE (Power over Ethernet) powered touch screen enables display of the integrated web interface of the connected ODAC measuring head. It is supplied with a holder for fixing on the ODAC measuring head. Not for ODAC J versions.	VISU.001.01XXX
	

Description	Order Number
Ethernet cable Ethernet network cable cat. 6 S/FTP with RJ45 connectors. (XXX in the order number stands for: x 0.1 m, e.g. A15 608 8025 stands for 25 x 0.1 m and thus a cable that is 2.5 m long). Not for ODAC J versions.	A15 608 8XXX

Description	Order Number
Analogue interface AI4-R Interface with 4 analogue, 5 digital and 2 relay outputs. Direct connection of the digital input (proximity switch). Not for ODAC J versions.	ODAC.001.100
	

Description	Order Number
Connector Counter connector for digital input "I/F". Connection of a proximity switch. It is not required, if the analogue interface is already used. Not for ODAC J versions.	A10 125 0070
	

Description	Order Number
Signal cable L2 Bus 1DR22 x 02R For the connection between the Profibus DP interface and the customer's data acquisition system. Only for DP version.	A13 252 0150

Technical Data

Model ODAC 14XY-						
Version	Standard			Micro		
Measuring field M ¹⁾	16 x 16 mm (.64 x .64 in.)			3 x 3 mm (.12 x .12 in.)		
Min. object ø	0.06 mm (.0024 in.)			0.015 mm (.0006 in.)		
Scanning frequency	2 x 500 scans/s			2 x 500 scans/s		
Scanning speed	65.8 m/s (215.9 ft./s)			65.8 m/s (215.9 ft./s)		
Width of laser beam ³⁾	0.5 mm (.02 in.)			0.5 mm (.02 in.)		
Repeatability (3 σ)	0.16 μm (.0000062 in.) (Averaging time 0.1 s) 0.07 μm (.0000027 in.) (Averaging time 1 s)					
Measurement error	± 0.8 μm (.000032 in.) ± 0.15‰			± 0.3 μm (.000012 in.) range up to 0.5 mm (.02 in.) ± 0.8 μm (.000032 in.) range up to 3 mm (.12 in.)		
Resolution ²⁾	0.1 μm (.000005 in.)					
Light source ⁴⁾	VLD (Visible Laser Diode) 650 nm, laser class 2 (device)			VLD (Visible Laser Diode) 405 nm, laser class 2 (device)		
Interfaces / Connections						
Models	ODAC 14XY-EN-RSx	ODAC 14XY-EN-DPx	ODAC 14XY-EN-ENx	ODAC 14XY-EN-PNx	ODAC 14XY-EN-EIx	ODAC 14XY-J/J-M
Interface Service	Ethernet TCP/IP, RJ45 10/100BaseT, PoE (PSE), galvanically isolated					
Interface Host	RS-232/-422/-485, D-sub. connectors 9p./m, galvan. isolated	Profibus DP (RS-485), D-sub. connector 9p./f, galvanically isolated	Ethernet TCP/IP, 2 x RJ45 10/100BaseT, galvanically isolated	Profinet IO, 2 x RJ45 10/100BaseT, galvanically isolated	EtherNet/IP, 2 x RJ45 10/100BaseT, galvanically isolated	Only J interfaces to Zumbach processors: USYS 20, USYS 200, USYS IPC 1e, USYS IPC 2e, CI 1J/EN-RS/-DP/-EN/-PN/-EI
Data rate max. standard	125/s	63/s	125/s	63/s	63/s	
Interface LOC	Only for Zumbach local display LOC 01					
Interface I/F	Can be used for the connection of a remote interface (e.g. AI4-R) or as digital input for length detector (e.g. proximity switch according to EN 60947-5-6, NAMUR)					
Indicator of contaminated windows	Flashing LED on the measuring head					
LED Service interface	Indicates link and traffic					
LED Host interface	Indicates traffic	Indicates traffic and error	Indicates link and traffic	Indicates link, traffic, system error and bus error	Indicates link, traffic, module status and network status	-
Energy supply						
Mains voltage	100-240 VAC					
Operating range	85-265 VAC typically					
Mains frequency	50/60 Hz					
Operating range	47-63 Hz typically					
Power	35 VA					
Supplied by the processor unit (24 VDC / 5 W)						
Operation conditions / Miscellaneous						
Ambient temperature	Operating: 0...45°C (32...113°F), Transport / Storage: -20...50°C (-4...122°F)					
Max. atmospheric humidity	95% (non condensing)					
Altitude	0...3000 m (0...9843 ft.) over sea level					
Type of protection ⁵⁾	Case IP 65, connection plate IP 40					
Weight	3.1 kg (6.83 lbs)					

• Technical specifications are subject to change without notice



¹⁾ M stands for measuring field height. In practice, the largest object diameter corresponds to Measuring Field Height minus instability of position.

²⁾ System resolution is the smallest practical value on the last digit of the display.

³⁾ Measured in the measuring plane, incl. lateral jitter of the scans.

⁴⁾ Maximum power of the laser can be read on the warning label.

⁵⁾ Conformity not verified by UL.

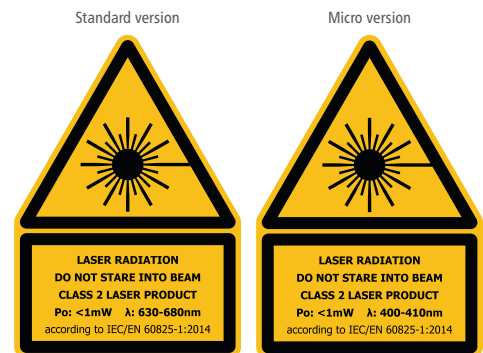

Ordering Information

When ordering, please specify the following:

1 Measuring head models: ODAC 14XY-EN-RS/-DP/-EN/-PN/-EI (-M), ODAC 14XY-J/J-M

2 Connection cable

2a The connection between ODAC 14XY-EN-RS and the higher level system is to be provided by the customer (via serial interface).

2b For the ODAC 14XY-EN-DP versions, the connection to a higher level system is made with the signal cable # A13 252 0150.

2c For the ODAC 14XY-EN-EN/-PN/-EI versions, the connection from the measuring head to the customer's Ethernet port, must be provided by the customer.

2d Length of the connection cable between ODAC 14XY-J/J-M and the processor.

Available lengths: 1, 2, 5, 10, 15, 20, 25 and 30 m (3.3, 6.6, 16.4, 32.8, 49.2, 65.6, 82 and 98.5 ft.); Longer cables on request.

3 Processor model (Data acquisition system), only for ODAC 14XY-J/J-M: USYS 20, USYS 200, USYS IPC 1e, USYS IPC 2e, CI 1J/EN-RS, CI 1J/EN-DP, CI 1J/EN-EN, CI 1J/EN-PN, CI 1J/EN-EI. Please ask for corresponding data sheets.

WORLDWIDE CUSTOMER SERVICE AND SALES OFFICES



Headquarter:
Zumbach Electronic AG
P.O. Box
CH-2552 Orpund
SWITZERLAND
Tel.: +41 (0)32 356 04 00
sales@zumbach.ch

BENELUX, sales@zumbach.be
CHINA P.R., sales@zumbach.com.cn
CZECH REPUBLIC, jvorlicek@zumbach.cz
FRANCE, ventes@zumbach.com.fr
GERMANY, verkauf@zumbach.de

INDIA, sales@zumbachindia.com
ITALY, zumit@zumbach.it
SPAIN, gestion@zumbach.es
TAIWAN, info@zumbach.tw
UK, sales@zumbach.co.uk

North American Headquarter:
Zumbach Electronics Corp.
140 Kisco Avenue
Mount Kisco, NY 10549-1407
Phone +1 914 241 7080
USA
sales@zumbach.com

