

# ODAC<sup>®</sup> 64XY

Modern two axis measuring head from the ODAC<sup>®</sup> laser measuring unit series. Highest accuracy, robustness, reliability and functionality distinguish all the laser measuring heads from ZUMBACH. Thanks to the compact design, the ODAC<sup>®</sup> 64XY measuring heads can be used in virtually every manufacturing process in the wire and cable industry, the plastics and rubber industry as well as the steel and metal industry. Known for precision, quality and ease of use the laser measuring heads from ZUMBACH are among the best of their class.

The technological basis considered for these measuring heads is always of the latest cutting edge technology, with laser diodes as light sources combined with intelligent and powerful measured-value processors which facilitate a simple and flexible integration. Our long-standing experience as a pioneer of in-line measuring technology, combined with high production figures result in a product with an excellent price-performance ratio.

Amongst the outstanding features are features such as single scan calibration (CSS), single scan monitoring and high data rate output of up to 300\* data packages per second. The measuring heads can be used with all line speeds. Vibrations during production have no noticeable influence on measurements.

### Adaptive signal processing in the measuring units increase accuracy

All the measuring heads of the ODAC<sup>®</sup> series have adaptive signal processing (patent DE3111356), which makes subsequent regular re-calibrations superfluous. Only in instances of component exchange or compliance to calibration regulations ISO 9000/9001 etc. would re-calibration be required.

All the relevant parameters for accuracy are continuously monitored by the measuring system and automatically compensated. This is valid in particular also for possible long-term changes of the behaviour of the scanner motor or the measuring electronics.

\* Depending on the measuring head model, the number of transmitted measured values as well as the baud rate of the interface.

Display unit (option):  
VISU-Touch or LOC 01




### Main Advantages

- Very high scan rate (measuring frequency)  
Standard: 2 x 1200/s, Version F: 2 x 2500/s
- High precision measurement
- High insensitivity to dirt and dust
- Easily removable splash guards (snap in/out)

### Flexible communication integration


- RS (-232 /-422 /-485)
- DP (Profibus DP)
- EN (Ethernet TCP/IP)
- PN (Profinet IO V2.3)
- EI (EtherNet/IP)
- J (digital, for connection to USYS processors)

### Dimensions

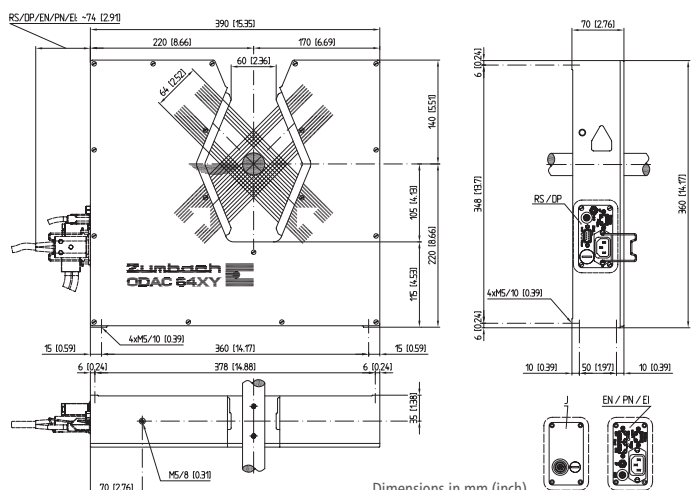

# System Overviews


## ODAC® 64XY-EN-RS (serial interface)

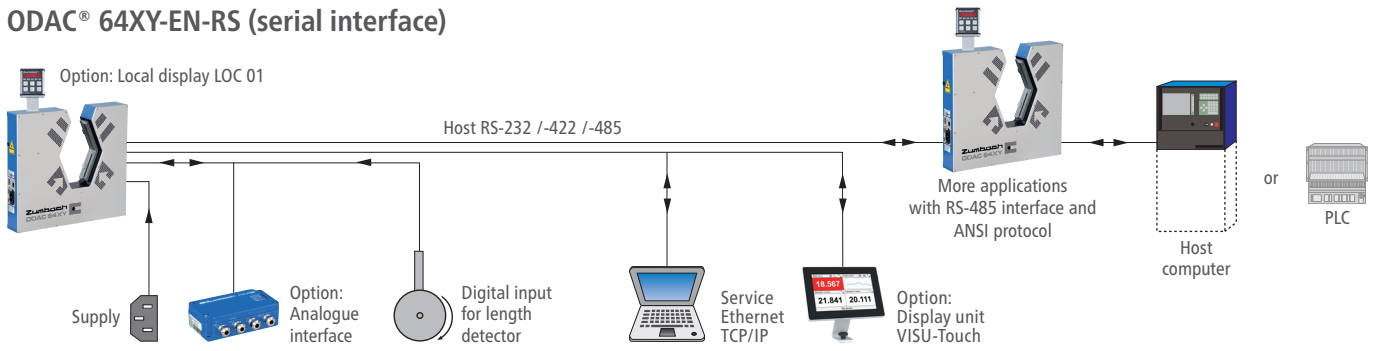

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. The RS version communicates via the integrated RS interface with a higher level system, like USYS from Zumbach, Host

computer (or PLC). The Zumbach protocols ODAC or Host are selectable according to choice. The service interface (Ethernet TCP/IP) is used for configuring the measuring system.


## ODAC® 64XY-EN-DP (Profibus DP), -EN-PN (Profinet IO) or -EN-EI (EtherNet/IP)

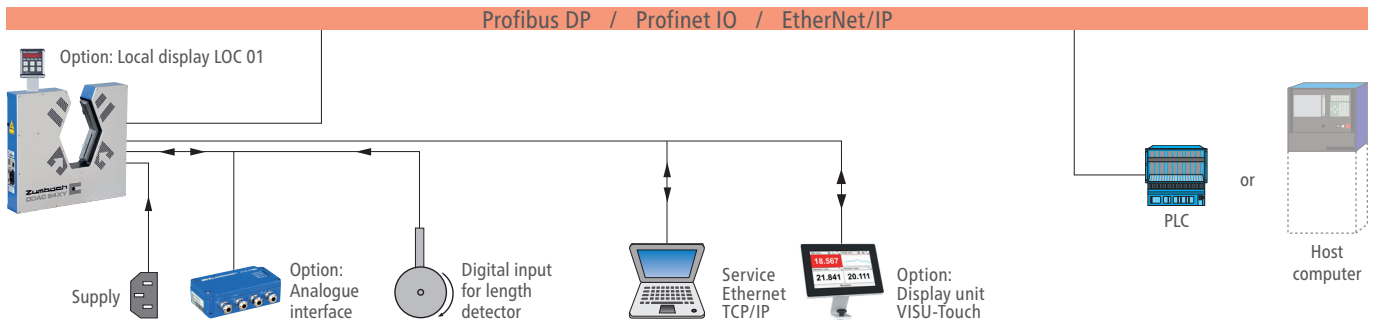

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. These versions communicate via the integrated Profibus DP, Profinet IO or EtherNet/IP interface with a higher level system. These interfaces are designed for high speed data transfer at

the sensor actuator level. At this level, controllers such as programmable logic controllers (or PLC's) exchange data via a fast serial (Profibus DP) or Ethernet (Profinet IO) connection with their distributed peripherals such as drivers, valves or intelligent slaves like ODAC measuring heads from Zumbach.


## ODAC® 64XY-EN-EN (Ethernet)

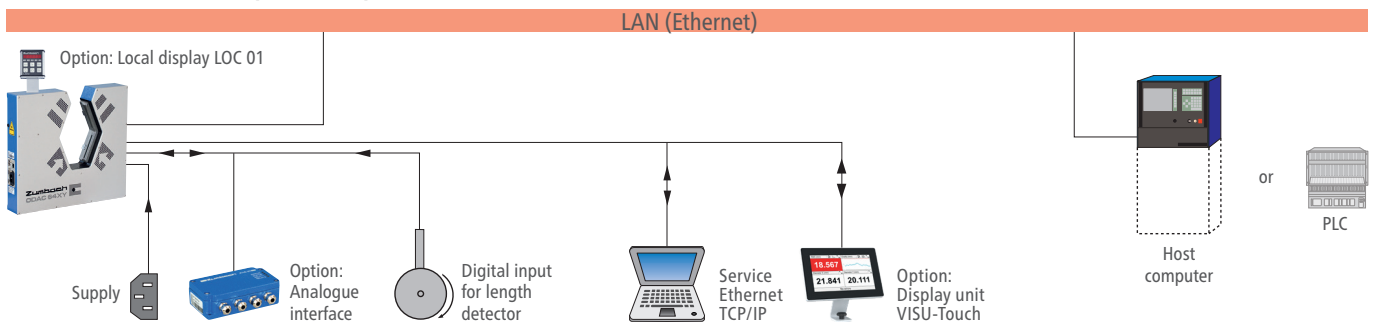

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. The EN version communicates via the integrated EN interface with a higher level system. The measured values and

parameters are integrated and transferred using a selectable Zumbach protocol (ODAC or Host protocol) in standardized packages of the TCP/IP. TCP/IP allows the data transfer through existing networks such as LANs and others.

## ODAC® 64XY-J with the corresponding external ZUMBACH processors

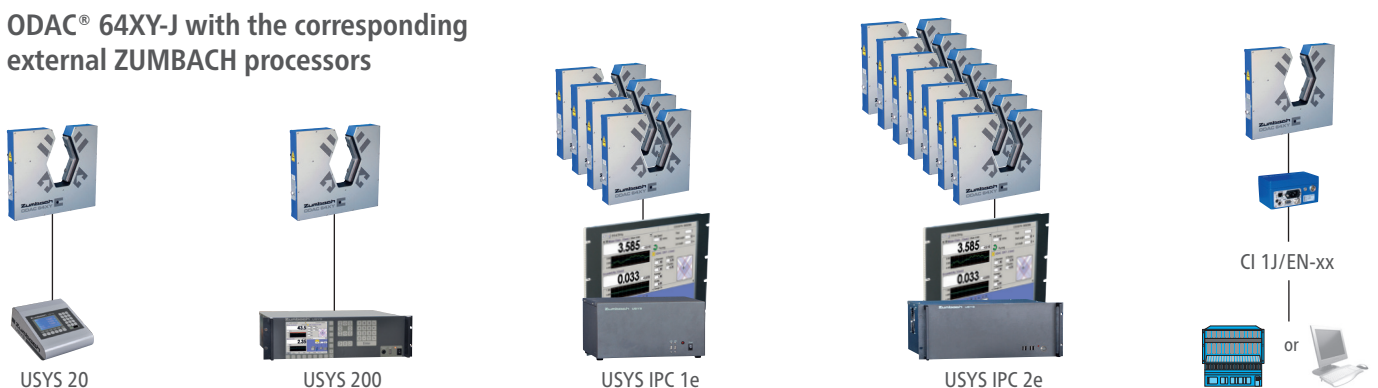

## Accessories

### Description Order Number

#### Adjus. device, DVW 1-ODAC64XYfix + 67.5°/-22.5° DVW.101.910

For a continuous adjustment of the inclination of both measuring axes according to the horizontal and vertical. Adjustment range +67.5°/-22.5°. Only for ODAC J versions.




#### Floor stand ST1-DVW 1 (horizontal) ST01.392.98000

#### Floor stand ST1-DVW 1 45° ST01.392.98010

Vertically adjustable.

Line height (H): 900...1200 mm (35.43...47.25 in.)

Only for ODAC J versions.




#### Floor stand ST2-ODAC 64XY ST02.104.76000

#### Floor stand ST2-ODAC 64XY 45° ST02.104.76010

Vertically adjustable.

Line height (H): 900...1200 mm (35.43...47.25 in.)



#### Mountable support for ST2 ST02.060.190


Lateral support, including rotary holder (USY.0002.910) for table top version of the USYS 20 processor.



#### Swivel floor stand ST6-ODAC 64XY ST06.144.64000

Vertically adjustable.

Line height (H): 880...1180 mm (34.65...46.46 in.)  
Swivel angle: 90° (upward)



#### Guide VR64-ODAC64 ODAC.641.400

With steel rollers (V shape). Height adjustable. For measured object diameter up to 64 mm (2.52 in.).



#### Guide VRG64-ODAC64 0-64mm ODAC.641.410

With steel rollers (V shape) and counter roller. Continuously adjustable. For measured object diameter up to 64 mm (2.52 in.).



#### Limiting socket VF64-ODAC64 ODAC.641.420

Used as a device to delimit the measuring field. It has no guiding function!



#### Limiting socket VF60-ODAC64 45° ODAC.641.430

This limiting socket is used when the measuring head is installed on a floor stand with a 45° inclination. Used as a device to delimit the measuring field. It has no guiding function!



#### Guide FRG60B/20-ODAC64 ODAC.641.440

With adjustable counter rollers for precis guiding of flat products. Maximum product dimensions: width 60 mm (2.36 in.), height 20 mm (.79 in.).



### Description Order Number

#### Heat shield HS-ODAC64XY-Front ODAC.641.930

Protects the front side of the measuring head from heat radiation.

#### Heat shield HS-ODAC64XY-Back ODAC.641.920

Protects the back side of the measuring head from heat radiation.

#### Air curtain LV-ODAC64XY ODAC.641.900

This air curtain, supplied with compressed air, is used instead of the standard installed splash guards. The air curtain protects the measuring windows from contamination through steam and other "floating" particles. Not suitably for water splashes. ► Suitable maintenance kit see below.



#### Maintenance kit A34 200 0050

Cleans and keeps the compressed air free of dirt. Features: Filter regulators, submicrofilter, manometer, pressure difference display, automatic condensate emptying and wall fixture.



#### Set of calibration standards ODAC.9500.90000

Delivered in a protection box, comprising:

- Calibration standard holder
- Calibration standard ø 2 mm
- Calibration standard ø 50 mm
- Certificate

Other calibration standards on request.



#### Local display LOC 01 LOC.011.01000

Is mounted directly on the measuring head. Requires connection cable # ODAC.9167.00004 between LOC 01 and the measuring head. Not for ODAC J versions.



#### VISU-Touch VISU.001.01XXX

The VISU-Touch is a rugged and compact 7" touch screen. This universal PoE (Power over Ethernet) powered touch screen enables display of the integrated web interface of the connected measuring head. It is supplied with a holder for fixing on the measuring head. Not for ODAC J versions.



#### Ethernet cable A15 608 8XXX

Ethernet network cable cat. 6 S/FTP with RJ45 connectors. (XXX in the order number stands for: x 0.1 m, e.g. A15 608 8025 stands for 25 x 0.1 m and thus a cable that is 2.5 m long). Not for ODAC J versions.

#### PoE Injector 48V, 24W N2.7860.1000

Power over Ethernet supply for devices that do not support PoE or a long Ethernet cable. Not for ODAC J versions.



#### Analogue interface AI4-R ODAC.001.100

Interface with 4 analogue, 5 digital and 2 relay outputs. Direct connection of the digital input (proximity switch). Not for ODAC J versions.



#### Signal cable L2 Bus 1DR22 x 02R A13 252 0150

For the connection between the Profibus DP interface and the customer's data acquisition system. Only for DP version.


#### Connector A10 125 0070

Counter connector for digital input "I/F". Connection of a proximity switch. It is not required if the analogue interface is used already. Not for ODAC J versions.



#### Proximity switch A16 100 0110

The proximity switch is used for the length detection. Main data:  
– Standard: EN 60947-5-6 (NAMUR, NC)  
– Switching distance max. 2 mm (.08 in.), flush mounting  
– Ambient temperature: -25...100° C (-13...212° F)  
– Protection: IP 67, Connection: PVC cable 2 m (6.5 ft.)



# Technical Data

Model ODAC 64XY-	EN-RS	EN-DP	EN-EN	EN-PN	EN-EI	J
<b>Measurement</b>						
Measuring field M <sup>1)</sup>	64 x 64 mm (2.52 x 2.52 in.)					
Min. object $\phi$	0.25 mm (.01 in.)					
Scanning frequency	2 x 1200 scans/s (standard); F version: 2 x 2500 scans/s					
Scanning speed	207.5 m/s (680.8 ft./s) (standard); F version: 432.3 m/s (1418.3 ft./s)					
Width of laser beam <sup>3) 5)</sup>	3.5 mm (.14 in.) (standard); xxN-F version: 0.5 mm (.02 in.)					
Repeatability (3 $\sigma$ )	0.6 $\mu$ m (.000024 in.) (Averaging time 0.1 s) 0.25 $\mu$ m (.00001 in.) (Averaging time 1 s)					
Measurement error	$\pm$ 2 $\mu$ m (.00008 in.) $\pm$ 0.1‰					
Resolution <sup>2)</sup>	0.1 $\mu$ m (.000005 in.)					
Light source <sup>4)</sup>	VLD (Visible Laser Diode) 630-680 nm, laser class 2 (device)					
<b>Interfaces / Connections</b>						
Interface Service	Ethernet TCP/IP, RJ45 10/100BaseT, galvanically isolated					Only J interfaces to Zumbach processors: USYS 20, USYS 200, USYS IPC 1e, USYS IPC 2e, CI 1J/EN-RS/-DP/-EN/-PN/-EI
Interface Host	RS-232/-422/-485, D-sub. connectors 9p./m, galvanically isolated	Profibus DP (RS-485), D-sub. connector 9p./f, galvanically isolated	Ethernet TCP/IP, 2 x RJ45 10/100BaseT, galvanically isolated	Profinet IO, 2 x RJ45 10/100BaseT, galvanically isolated	EtherNet/IP, 2 x RJ45 10/100BaseT, galvanic. isolated	
Data rate max. standard	300/s	60/s	300/s	60/s	200/s	
Data rate max. F version	250/s	125/s	250/s	125/s	179/s	
Interface LOC	Only for Zumbach local display LOC 01					
Interface I/F	Can be used for the connection of a remote interface (e.g. AI4-R) or as digital input for length detector (e.g. proximity switch according to EN 60947-5-6, NAMUR)					
Indicator of contamin. windows	Flashing LED on the measuring head					
LED Service interface	Indicates link and traffic					-
LED Host interface	Indicates traffic	Indicates traffic and error	Indicates link and traffic	Indicates link, traffic, system error and bus error	Indicates link, traffic, module status and network status	-
<b>Energy supply</b>						
Mains voltage	100-240 VAC					Supplied by the processor unit (24 VDC / 5 W)
Operating range	85-265 VAC typically					
Mains frequency	50/60 Hz					
Operating range	47-63 Hz typically					
Power	20 VA					
<b>Operation conditions / Miscellaneous</b>						
Ambient temperature	Operating: 0...45°C (32...113°F), Transport / Storage: -20...50°C (-4...122°F)					
Max. atmospheric humidity	95% (non condensing)					
Altitude	0...3000 m (0...9843 ft.) over sea level					
Type of protection <sup>6)</sup>	Case IP 65, connection plate IP 40					
Weight	7.6kg (16.76 lbs)					

• Technical specifications are subject to change without notice

<sup>1)</sup> M stands for measuring field height. In practice, the largest object diameter corresponds to Measuring Field Height minus instability of position.


<sup>2)</sup> System resolution is the smallest practical value on the last digit of the display.

<sup>3)</sup> Measured in the measuring plane, incl. lateral jitter of the scans.

<sup>4)</sup> Maximum power of the laser can be read on the warning label.

<sup>5)</sup> The xxN-F versions (Narrow beam) is recommended in case of products with very uneven surfaces, for the contour measurement and detection of surface defects, such as lumps and neckdowns.

<sup>6)</sup> Conformity not verified by UL.



## Ordering Information

When ordering, please specify the following:

1 **Measuring head models:** ODAC 64XY-EN-RS/-DP/-EN/-PN/-EI, ODAC 64XY-J

2 **Connection cable**

2a The connection between ODAC 64XY-EN-RS and the higher level system is to be provided by the customer (via serial interface).

2b For the ODAC 64XY-EN-DP versions, the connection to a higher level system is made with the signal cable # A13 252 0150.

2c For the ODAC 64XY-EN-EN/-PN/-EI versions, the connection from the measuring head to the customer's Ethernet port, must be provided by the customer.

2d **Length** of the connection cable between ODAC 64XY-J and the processor.

Available lengths: 1, 2, 5, 10, 15, 20, 25 and 30 m (3.3, 6.6, 16.4, 32.8, 49.2, 65.6, 82 and 98.5 ft.); Longer cables on request.

3 **Processor model** (Data acquisition system), only for ODAC 64XY-J: USYS 20, USYS 200, USYS IPC 1e, USYS IPC 2e, CI 1J/EN-RS, CI 1J/EN-DP, CI 1J/EN-EN, CI 1J/EN-PN, CI 1J/EN-EI. Please ask for corresponding data sheets.

## WORLDWIDE CUSTOMER SERVICE AND SALES OFFICES



Headquarter:  
Zumbach Electronic AG  
P.O. Box  
CH-2552 Orpund  
SWITZERLAND  
Tel.: +41 (0)32 356 04 00  
sales@zumbach.ch

BENELUX, sales@zumbach.be  
CHINA P.R., sales@zumbach.com.cn  
CZECH REPUBLIC, jvorlicek@zumbach.cz  
FRANCE, ventes@zumbach.com.fr  
GERMANY, verkauf@zumbach.de

INDIA, sales@zumbachindia.com  
ITALY, zumit@zumbach.it  
SPAIN, gestion@zumbach.es  
TAIWAN, info@zumbach.tw  
UK, sales@zumbach.co.uk

North American Headquarter:  
Zumbach Electronics Corp.  
140 Kisco Avenue  
Mount Kisco, NY 10549-1407  
Phone +1 914 241 7080  
USA  
sales@zumbach.com

