

# ODAC® 34XY

Modern two axis measuring head from the ODAC® laser measuring unit series. Highest accuracy, robustness, reliability and functionality distinguish all the laser measuring heads from ZUMBACH. Thanks to the compact design, the ODAC® 34XY measuring heads can be used in virtually every manufacturing process in the wire and cable industry, the plastics and rubber industry as well as the steel and metal industry. Known for precision, quality and ease of use the laser measuring heads from ZUMBACH are among the best of their class.

The technological basis considered for these measuring heads is always of the latest cutting edge technology, with laser diodes as light sources combined with intelligent and powerful measured-value processors which facilitate a simple and flexible integration. Our long-standing experience as a pioneer of in-line measuring technology, combined with high production figures result in a product with an excellent price-performance ratio.

Amongst the outstanding features are features such as single scan calibration (CSS), single scan monitoring and high data rate output of up to 300\* data packages per second.

The measuring heads can be used with all line speeds. Vibrations during production have no noticeable influence on measurements.

### Adaptive signal processing in the measuring units increase accuracy

All the measuring heads of the ODAC® series have adaptive signal processing (patent DE3111356), which makes subsequent regular re-calibrations superfluous. Only in instances of component exchange or compliance to calibration regulations ISO 9001 etc. would re-calibration be required.

All the relevant parameters for accuracy are continuously monitored by the measuring system and automatically compensated. This is valid in particular also for possible long-term changes of the behaviour of the scanner motor or the measuring electronics.

\* Depending on the measuring head model, the number of transmitted measured values as well as the baud rate of the interface.



Display unit (option): VISU-Touch or LOC 01


### Main Advantages

- Very high scan rate (measuring frequency)  
Standard: 2 x 1200/s, Version F: 2 x 2500/s
- High precision measurement
- High insensitivity to dirt and dust
- Easily removable splash guards (snap in/out)

### Flexible communication integration


- RS (-232 /-422 /-485)
- DP (Profibus DP)
- EN (Ethernet TCP/IP)
- PN (Profinet IO V2.3)
- EI (EtherNet/IP)  
(digital, for connection to USYS processors)
- J

### Dimensions

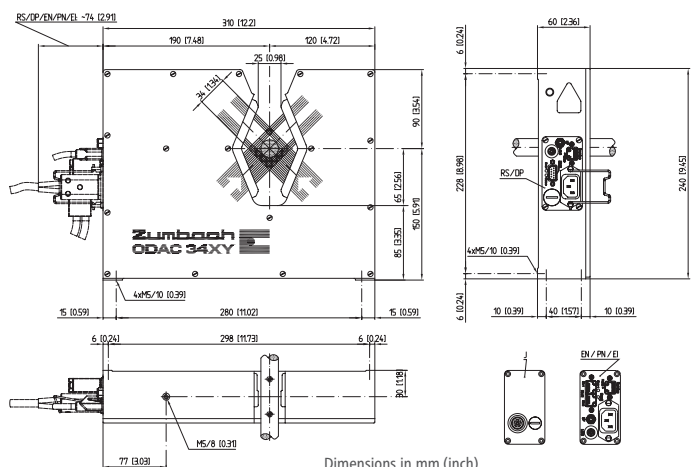

# System Overviews


## ODAC® 34XY-EN-RS (serial interface)

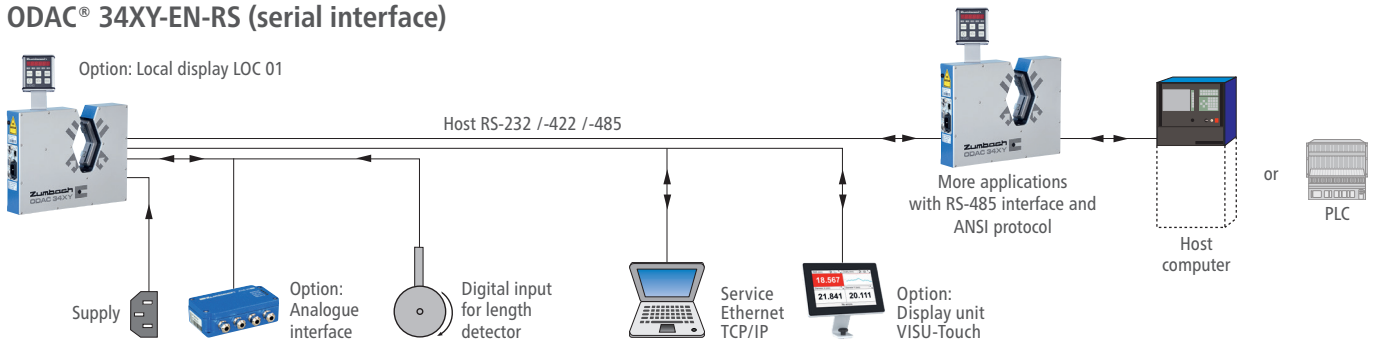

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. The RS version communicates via the integrated RS interface with a higher level system, like USYS from Zumbach, Host

computer (or PLC). The Zumbach protocols ODAC or Host are selectable according to choice. The service interface (Ethernet TCP/IP) is used for configuring the measuring system.


## ODAC® 34XY-EN-DP (Profibus DP), -EN-PN (Profinet IO) or -EN-EI (EtherNet/IP)

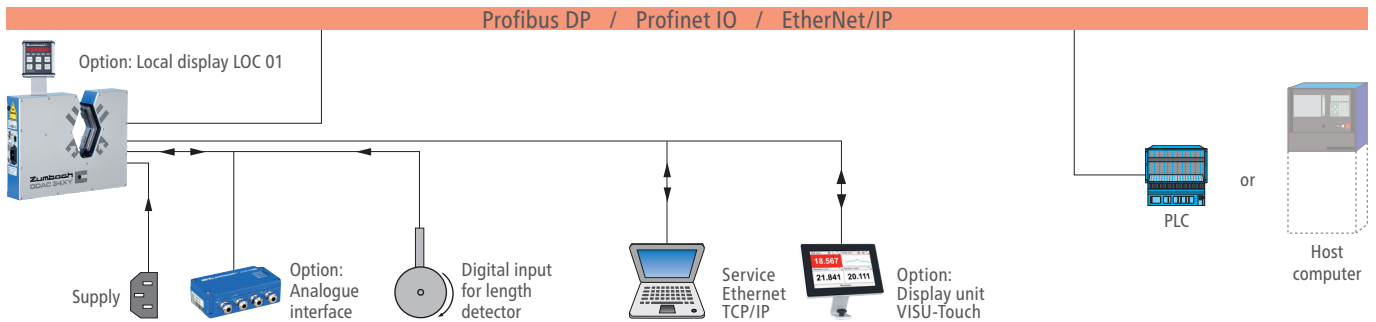

The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. These versions communicate via the integrated Profibus DP, Profinet IO or EtherNet/IP interface with a higher level system. These interfaces are designed for high speed data transfer at

the sensor actuator level. At this level, controllers such as programmable logic controllers (or PLC's) exchange data via a fast serial (Profibus DP) or Ethernet (Profinet IO) connection with their distributed peripherals such as drivers, valves or intelligent slaves like ODAC measuring heads from Zumbach.

## ODAC® 34XY-EN-EN (Ethernet)

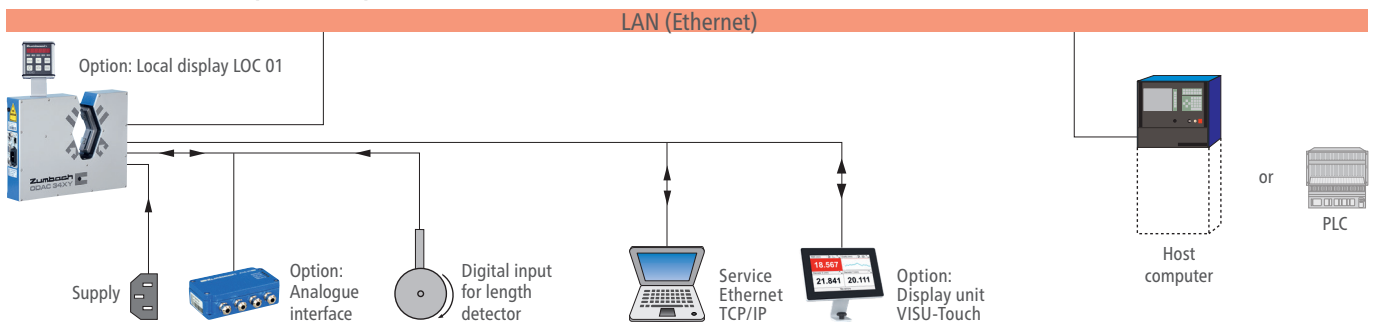












The built-in processor allows the acquisition and monitoring of the measured values, as well as statistic functions, parameter selection and many other functions. The EN version communicates via the integrated EN interface with a higher level system. The measured values and











parameters are integrated and transferred using a selectable Zumbach protocol (ODAC or Host protocol) in standardized packages of the TCP/IP. TCP/IP allows the data transfer through existing networks such as LANs and others.

## ODAC® 34XY-J with the corresponding external ZUMBACH processors



# Accessories

Description	Order Number
<b>Pivoting support, DVW 1-34XY-J/-JN-F</b> Mechanical device which pivots the measuring head continuously around the normal measuring axis within +/- 2.5°, 5°, 7.5° or 10° (selectable). With this method, the height and width of the profile can be measured accurately, regardless its angular position (twist).	DVW.101.03400 
<b>Adjustment device, DVW 1 +67.5°/- 22.5°</b> For a continuous adjustment of the inclination of both measuring axes according to the horizontal and vertical axis. ► Use only with pivoting device DVW.101.03400	DVW.101.900 
<b>Adjustment device, DVW 1 ± 45°</b> For a continuous adjustment of the inclination of both measuring axes according to the horizontal and vertical axis. ► Use only with pivoting device DVW.101.03400	DVW.101.920 
<b>Floor stand ST1-DVW 1 (horizontal)</b> <b>Floor stand ST1-DVW 1 45°</b> Vertically adjustable.  Line height (H): 900...1200 mm (35.43...47.25 in.)	ST01.392.98000 ST01.392.98010 
<b>Floor stand ST2-ODAC 34XY</b> <b>Floor stand ST2-ODAC 34XY 45°</b> Vertically adjustable.  Line height (H): 900...1200 mm (35.43...47.25 in.)	ST02.089.72250 ST02.089.72260 
<b>Mountable support for ST2</b> Lateral support, including rotary holder (USY.0002.910) for table top version of the USYS 20 processor.	ST02.060.190 
<b>Swivel floor stand ST6-ODAC 34XY</b> Vertically adjustable.  Line height (H): 860...1160 mm (33.86...45.67 in.) Swivel angle: 90° (upward)	ST06.143.34000 
<b>Guide VF32-ODAC34</b> With ceramic rollers (V shape). Height adjustable. For measured object diameter up to 32 mm (1.25 in.).	ODAC.341.400 
<b>Guide VR32-ODAC34</b> With steel rollers (V shape). Height adjustable. For measured object diameter up to 32 mm (1.25 in.).	ODAC.341.410 
<b>Limiting socket VF34-ODAC34</b> Used as a device to delimit the measuring field. It has <u>no</u> guiding function!	ODAC.341.420 
<b>Guide FRG40B-ODAC34</b> With flat steel rollers. Best for the precise and centric guiding of round products with diameter of up to 34 mm (1.34 in.).	ODAC.341.430 

Description	Order Number
<b>Guide VRG34B-ODAC34 /-F /-B</b> With steel rollers (V shape) and counter rollers. Infinitely adjustable onto the product diameter from 0...34 mm (0...1.34 in.). It is very suitable to damp product vibrations. 3 guide versions are available for the fixation onto the measuring head as follows: <ul style="list-style-type: none"> <li>– on both sides: order no.: ODAC.341.440</li> <li>– on the front side: order no.: ODAC.341.440-F</li> <li>– on the back side: order no.: ODAC.341.440-B</li> </ul>	ODAC.341.440 
<b>Heat shield HS-ODAC34XY-Front</b> Protects the front side of the measuring head from heat radiation.	ODAC.341.930
<b>Heat shield HS-ODAC34XY-Back</b> Protects the back side of the measuring head from heat radiation.	ODAC.341.920
<b>Air curtain LV-ODAC34XY</b> This air curtain, supplied with compressed air, is used instead of the standard installed splash guards. The air curtain protects the measuring windows from contamination through steam and other "floating" particles. Not suitable for water splashes. ► Suitable maintenance kit see below.	ODAC.341.900 
<b>Maintenance kit</b> Cleans and keeps the compressed air free of dirt. Features: Filter regulators, submicrofilter, manometer, pressure difference display, automatic condensate emptying and wall fixture.	A34 200 0050 
<b>Set of calibration standards</b> Delivered in a protection box, comprising: <ul style="list-style-type: none"> <li>– Calibration standard holder</li> <li>– Calibration standards ø 2 and 28 mm</li> <li>– Certificate</li> </ul> Other calibration standards on request.	ODAC.9500.78000 
<b>Local display LOC 01</b> Is mounted directly on the measuring head. Requires connection cable # ODAC.9167.00004 between LOC 01 and the measuring head. Not for ODAC J versions.	LOC.011.01000 
<b>VISU-Touch</b> The VISU-Touch is a rugged and compact 7" touch screen. This universal PoE (Power over Ethernet) powered touch screen enables display of the integrated web interface of the connected measuring head. It is supplied with a holder for fixing on the measuring head. Not for ODAC J versions.	VISU.001.01XXX 
<b>Ethernet cable</b> Ethernet network cable cat. 6 S/FTP with RJ45 connectors. (XXX in the order number stands for: x 0.1 m, e.g. A15 608 8025 stands for 25 x 0.1 m and thus a cable that is 2.5 m long). Not for ODAC J versions.	A15 608 8XXX
<b>PoE Injector 48V, 24W</b> Power over Ethernet supply for devices that do not support PoE or a long Ethernet cable. Not for ODAC J versions.	N2.7860.1000 
<b>Analogue interface AI4-R</b> Interface with 4 analogue, 5 digital and 2 relay outputs. Direct connection of the digital input (proximity switch). Not for ODAC J versions.	ODAC.001.100 
<b>Signal cable L2 Bus 1DR22 x 02R</b> For the connection between the Profibus DP interface and the customer's data acquisition system. Only for DP version.	A13 252 0150
<b>Connector</b> Counter connector for digital input "I/F". Connection of a proximity switch. It is not required if the analogue interface is used already. Not for ODAC J versions.	A10 125 0070 
<b>Proximity switch</b> The proximity switch is used for the length detection. Main data: <ul style="list-style-type: none"> <li>– Standard: EN 60947-5-6 (NAMUR, NC)</li> <li>– Switching distance max. 2 mm (.08 in.), flush mounting</li> <li>– Ambient temperature: -25...100° C (-13...212° F)</li> <li>– Protection: IP 67, Connection: PVC cable 2 m (6.5 ft.)</li> </ul>	A16 100 0110 

# Technical Data

Model ODAC 34XY-	EN-RS	EN-DP	EN-EN	EN-PN	EN-EI	J
<b>Measurement</b>						
Measuring field M <sup>1)</sup>	34 x 34 mm (1.34 x 1.34 in.)					
Min. object ø	0.15 mm (.006 in.)					
Scanning frequency	2 x 1200 scans/s (standard); F version: 2 x 2500 scans/s					
Scanning speed	117.9 m/s (386.8 ft./s) (standard); F version: 245.6 m/s (805.8 ft./s)					
Width of laser beam <sup>3) 5)</sup>	3 mm (.12 in.) (standard); xxN-F version: 0.3 mm (.012 in.)					
Repeatability (3 σ)	0.2 μm (.000008 in.) (Averaging time 0.1 s) 0.08 μm (.000003 in.) (Averaging time 1 s)					
Measurement error	± 1 μm (.00004 in.) ± 0.08%					
Resolution <sup>2)</sup>	0.1 μm (.000004 in.)					
Light source <sup>4)</sup>	VLD (Visible Laser Diode) 630-680 nm, laser class 2 (device)					
<b>Interfaces / Connections</b>						
Interface Service	Ethernet TCP/IP, RJ45 10/100BaseT, galvanically isolated					Only J interfaces to Zumbach processors: USYS 20, USYS 200, USYS IPC 1e, USYS IPC 2e, CI 1J/EN-RS/-DP/-EN/-PN/-EI
Interface Host	RS-232/-422/-485, D-sub. connectors 9p./m, galvanically isolated	Profibus DP (RS-485), D-sub. connector 9p./f, galvanically isolated	Ethernet TCP/IP, 2 x RJ45 10/100BaseT, galvanically isolated	Profinet IO, 2 x RJ45 10/100BaseT, galvanically isolated	EtherNet/IP, 2 x RJ45 10/100BaseT, galvanic. isolated	
Data rate max. standard	300/s	60/s	300/s	60/s	200/s	
Data rate max. F version	250/s	125/s	250/s	125/s	179/s	
Interface LOC	Only for Zumbach local display LOC 01					
Interface I/F	Can be used for the connection of a remote interface (e.g. AI4-R) or as digital input for length detector (e.g. proximity switch according to EN 60947-5-6, NAMUR)					
Indicator of contamin. windows	Flashing LED on the measuring head					
LED Service interface	Indicates link and traffic					–
LED Host interface	Indicates traffic	Indicates traffic and error	Indicates link and traffic	Indicates link, traffic, system error and bus error	Indicates link, traffic, module status and network status	–
<b>Energy supply</b>						
Mains voltage	100-240 VAC					Supplied by the processor unit (24VDC / 5W)
Operating range	85-265 VAC typically					
Mains frequency	50/60 Hz					
Operating range	47-63 Hz typically					
Power	20VA					
<b>Operation conditions / Miscellaneous</b>						
Ambient temperature	Operating: 0...45°C (32...113°F), Transport / Storage: -20...50°C (-4...122°F)					
Max. atmospheric humidity	95% (non condensing)					
Altitude	0...3000 m (0...9843 ft.) over sea level					
Type of protection <sup>6)</sup>	Case IP 65, connection plate IP 40					
Weight	4.5 kg (9.92 lbs)					

• Technical specifications are subject to change without notice

<sup>1)</sup> M stands for measuring field height. In practice, the largest object diameter corresponds to Measuring Field Height minus instability of position.


<sup>2)</sup> System resolution is the smallest practical value on the last digit of the display.

<sup>3)</sup> Measured in the measuring plane, incl. lateral jitter of the scans.

<sup>4)</sup> Maximum power of the laser can be read on the warning label.

<sup>5)</sup> The xxN-F versions (Narrow beam) is recommended in case of products with very uneven surfaces, for the contour measurement and detection of surface defects, such as lumps and neckdowns.

<sup>6)</sup> Conformity not verified by UL.



## Ordering Information

When ordering, please specify the following:

1 **Measuring head models:** ODAC 34XY-EN-RS/-DP/-EN/-PN/-EI, ODAC 34XY-J

2 **Connection cable**

2a The connection between ODAC 34XY-EN-RS and the higher level system is to be provided by the customer (via serial interface).

2b For the ODAC 34XY-EN-DP versions, the connection to a higher level system is made with the signal cable # A13 252 0150.

2c For the ODAC 34XY-EN-EN/-PN/-EI versions, the connection from the measuring head to the customer's Ethernet port, must be provided by the customer.

2d **Length** of the connection cable between ODAC 34XY-J and the processor.

Available lengths: 1, 2, 5, 10, 15, 20, 25 and 30 m (3.3, 6.6, 16.4, 32.8, 49.2, 65.6, 82 and 98.5 ft.); Longer cables on request.

3 **Processor model** (Data acquisition system), only for ODAC 34XY-J: USYS 20, USYS 200, USYS IPC 1e, USYS IPC 2e, CI 1J/EN-RS, CI 1J/EN-DP, CI 1J/EN-EN, CI 1J/EN-PN, CI 1J/EN-EI. Please ask for corresponding data sheets.



## WORLDWIDE CUSTOMER SERVICE AND SALES OFFICES



Headquarter:  
Zumbach Electronic AG  
P.O. Box  
CH-2552 Orpund  
SWITZERLAND  
Tel.: +41 (0)32 356 04 00  
sales@zumbach.ch

BENELUX, sales@zumbach.be  
CHINA P.R., sales@zumbach.com.cn  
CZECH REPUBLIC, jvorlicek@zumbach.cz  
FRANCE, ventes@zumbach.com.fr  
GERMANY, verkauf@zumbach.de

INDIA, sales@zumbachindia.com  
ITALY, zumit@zumbach.it  
SPAIN, gestion@zumbach.es  
TAIWAN, info@zumbach.tw  
UK, sales@zumbach.co.uk

North American Headquarter:  
Zumbach Electronics Corp.  
140 Kisco Avenue  
Mount Kisco, NY 10549-1407  
Phone +1 914 241 7080  
USA  
sales@zumbach.com

